



Description

Puro Eclectic is a new suspension light composition comprising handblown Puro tubes. The primary aim was to create a simple yet linearly dynamic and expressive composition to hang above dining tables. The name Eclectic was chosen based on the variously adjustable diagonal and intercommunicating glass tubes.



Tech. description

The Puro Eclectic light comprises three Puro tubes suspended from a single ceiling canopy. Each tube is hung from the power cable with Brokis connector and a wire rope. The electronics are housed in the ceiling canopy.


Colours options: https://brokis.sharepoint.com/:b:/s/brokis_sp/ESTY5_BWFFRPsg8p_QmsrjUBpcbWkBZx2R0VYZ6RHoO

CONSTRUCTION SPECIFICATION

| | |
|------------------------|--------------|
| Weight: | 30 kg |
| Construction material: | glass, metal |
| Cord length [mm]: | 2,000 mm |
| Mounting: | Ceiling |
| Environment: | Indoor |

DIMENSIONS [mm]

1320 x 520 x 50



ELECTRICAL SPECIFICATION

| | |
|--------------------|---------------------------------|
| Input voltage [V]: | 100 - 240 V |
| Frequency [Hz]: | 50-60 Hz |
| Max. power [W]: | 60 W LED |
| Coverage IP: | 20 |
| Socket: | - |
| Light source: | non-user replaceable LED module |
| Energy class: | A+ |

CERTIFICATIONS





CP7057

| | |
|--------------------------|------------|
| Type | LED module |
| Lamp wattage [W] | 20 W |
| Input voltage [V] | 24 VDC |
| Energy class | A+ |
| Flux [lm] | 1460 lm |
| Light colour [K] | 2700 K |
| CRI | 80+ |
| Lifespan [h] | 20000h |
| Dimmable | yes (PWM) |



DATASHEET


RECOMENDED CANOPY



Download



CEILING CANOPY

Dimensions l x w x h [mm] 1350 x 520 x 50 mm
Weight [kg] 17,5 kg
Material metal

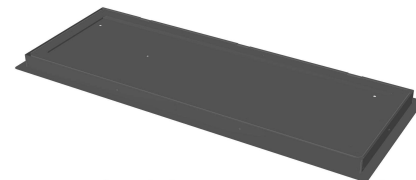

Drawing

Canopy bracket

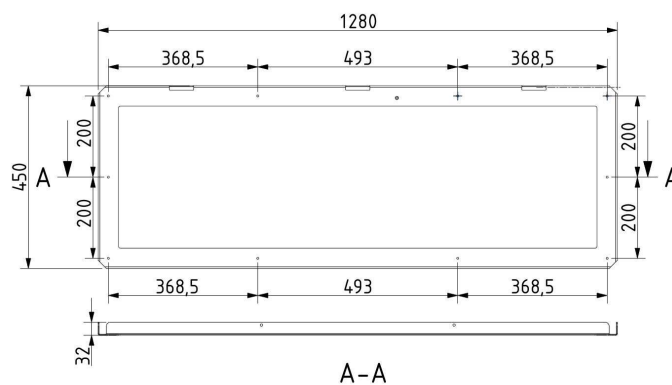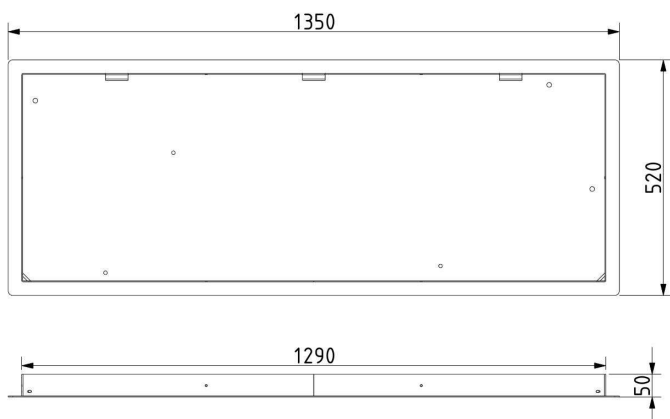

BROKIS S.R.O.
ŠPANILOVA 1315/25
163 00 PRAHA 6 - ŘEPY
CZECH REPUBLIC

ORG ID 64940799
VAT ID CZ64940799
C 42174 MĚSTSKÝ SOUD
V PRAZE

TEL +420 567 211 517
TECHNICAL@BROKIS.CZ
INFO@BROKIS.CZ
WWW.BROKIS.CZ

2021_02
PAGE 3

PRODUCT INFORMATION SHEET



Name PURO ECLECTIC RECTANGULAR SET 1000

Type pendent lamp

ID PC1115



Description Puro is a boldly minimalistic variation on atmospheric pendant lights. Inspiration for the collection and its name come from the Spanish word for "cigar", which also means "pure" and is a reference to the composition's clean lines. The diffused glow of the tubes to elicit a dynamic ambience, while the alternating gloss and matte finishes provide a degree of provocation. Puro offers atmospheric room lighting as well as lighting for offices, hospitality interiors, boutiques, showrooms and private dining areas.

Technical description The craftsmanship applied in production follows in the centuries-old tradition and experience of master glassmakers. The precision crafting of hand-blown glass instills distinctive, enduring character and outstanding quality in all Brokis products. The glass shades are formed from multiple layers of molten glass, each of which is scrutinized by the master glassmaker prior to being blown into the mold. Up to 70% of the resulting quality is achieved in this stage of production

Glass Colour

| | | |
|---------------------|---|---------|
| triplex opal | A | CGC39 |
| dark grey - opaline | B | CGC1507 |

Glass surface

| | | |
|-------------------------------|---|---------|
| acid-etched both side surface | A | CGSU881 |
|-------------------------------|---|---------|

Body finish

| | | |
|------------------------------------|---|--------|
| metal - black matte powder coating | A | CCS846 |
| metal - white matte powder coating | A | CCS845 |

Canopy finish

| | | |
|------------------------------------|---|---------|
| metal - black matte powder coating | A | CCSC619 |
| metal - white matte powder coating | A | CCSC618 |

Connection method

| | | |
|----------------------|---|---------|
| BROKIS connector 24V | A | CCM1019 |
|----------------------|---|---------|

Connection method

Cable colour

| | | |
|-----------------------|---|---------|
| textile cable - black | A | CECL519 |
| textile cable - white | A | CECL521 |

LED Source

| | | |
|---|---|----------|
| 1000mm 24V, LED, 25W, 2700K, 1910lm, RA90+, DIM | A | LEDS1932 |
| 1000mm 24V, LED, 25W, 4000K, 2115lm, RA90+, DIM | A | LEDS1933 |
| 1000mm 24V, LED, 25W, 5000K, 2260lm, RA90+, DIM | A | LEDS1934 |

Dimmable version

| | | |
|--|---|----------|
| non-dimmable version | A | CEDV1457 |
| DIM RF system - remote control version | A | CEDV1461 |
| DIM PWM signal | A | CEDV1459 |
| DIM 1-10V | A | CEDV1460 |
| DIM DALI version | A | CEDV1458 |
| DIM AC phase-cut | A | CEDV1730 |
| DIM CASAMBI CBU-PWM4 | A | CEDV2854 |