





The sizes are expressed in millimeters.

DESIGN DAVIDE GROPPI - 2015
LAMPADA DA PARETE E DA SOFFITTO - METALLO
WALL AND CEILING LAMP - METAL



CE  IP20

DOT P ENDLESS



1A2340300.27.40	BIANCO OPACO / MATT WHITE - 2700K - ENDLESS	48 V DC - 13 W LED
1A2340300.30.40	BIANCO OPACO / MATT WHITE - 3000K - ENDLESS	WITH LENS 1A3090000.00.00: 2700K - 983 lm - CRI 97 / 3000K - 1038 lm - CRI 97
1A2340400.27.40	NERO OPACO / MATT BLACK - 2700K - ENDLESS	WITH LENS 1A3100000.00.00: 2700K - 943 lm - CRI 97 / 3000K - 996 lm - CRI 97
1A2340400.30.40	NERO OPACO / MATT BLACK - 3000K - ENDLESS	WITH LENS 1A3110000.00.00: 2700K - 955 lm - CRI 97 / 3000K - 1005 lm - CRI 97
		WITH LENS 1A3120000.00.00: 2700K - 965 lm - CRI 97 / 3000K - 1016 lm - CRI 97
		KIT DI ALIMENTAZIONE OBBLIGATORIO ENDLESS NON INCLUSO
		ACCESSORI OBBLIGATORI NON INCLUSI
		COMPULSORY ENDLESS POWER SUPPLY KIT NOT INCLUDED
		COMPULSORY ACCESSORIES NOT INCLUDED

ACCESSORI OBBLIGATORI / COMPULSORY ACCESSORIES

1A3090000.00.00	LENS - NARROW BEAM	DOT LENS
1A3100000.00.00	LENS - MEDIUM BEAM	
1A3110000.00.00	LENS - WIDE BEAM	
1A3120000.00.00	LENS - ULTRA WIDE BEAM	





The sizes are expressed in millimeters.

DESIGN DAVIDE GROPPI - 2015
LAMPADA DA PARETE E DA SOFFITTO - METALLO
WALL AND CEILING LAMP - METAL

DOT P ENDLESS

 CASAMBI VERSION


CE  IP20




1A2340300.27.41	BIANCO OPACO / MATT WHITE - 2700K - ENDLESS CASAMBI	48 V DC - 15,5 W LED
1A2340300.30.41	BIANCO OPACO / MATT WHITE - 3000K - ENDLESS CASAMBI	WITH LENS 1A3090000.00.00: 2700K - 983 lm - CRI 97 / 3000K - 1038 lm - CRI 97
1A2340400.27.41	NERO OPACO / MATT BLACK - 2700K - ENDLESS CASAMBI	WITH LENS 1A3100000.00.00: 2700K - 943 lm - CRI 97 / 3000K - 996 lm - CRI 97
1A2340400.30.41	NERO OPACO / MATT BLACK - 3000K - ENDLESS CASAMBI	WITH LENS 1A3110000.00.00: 2700K - 955 lm - CRI 97 / 3000K - 1005 lm - CRI 97
		WITH LENS 1A3120000.00.00: 2700K - 965 lm - CRI 97 / 3000K - 1016 lm - CRI 97
		DIMMERABILE CON CONTROLLO WIRELESS CASAMBI
		KIT DI ALIMENTAZIONE OBBLIGATORIO ENDLESS NON INCLUSO
		ACCESSORI OBBLIGATORI NON INCLUSI
		DIMMABLE WITH CASAMBI WIRELESS CONTROL
		COMPULSORY ENDLESS POWER SUPPLY KIT NOT INCLUDED
		COMPULSORY ACCESSORIES NOT INCLUDED

ACCESSORI OBBLIGATORI / COMPULSORY ACCESSORIES

1A3090000.00.00	LENS - NARROW BEAM	DOT LENS
1A3100000.00.00	LENS - MEDIUM BEAM	
1A3110000.00.00	LENS - WIDE BEAM	
1A3120000.00.00	LENS - ULTRA WIDE BEAM	

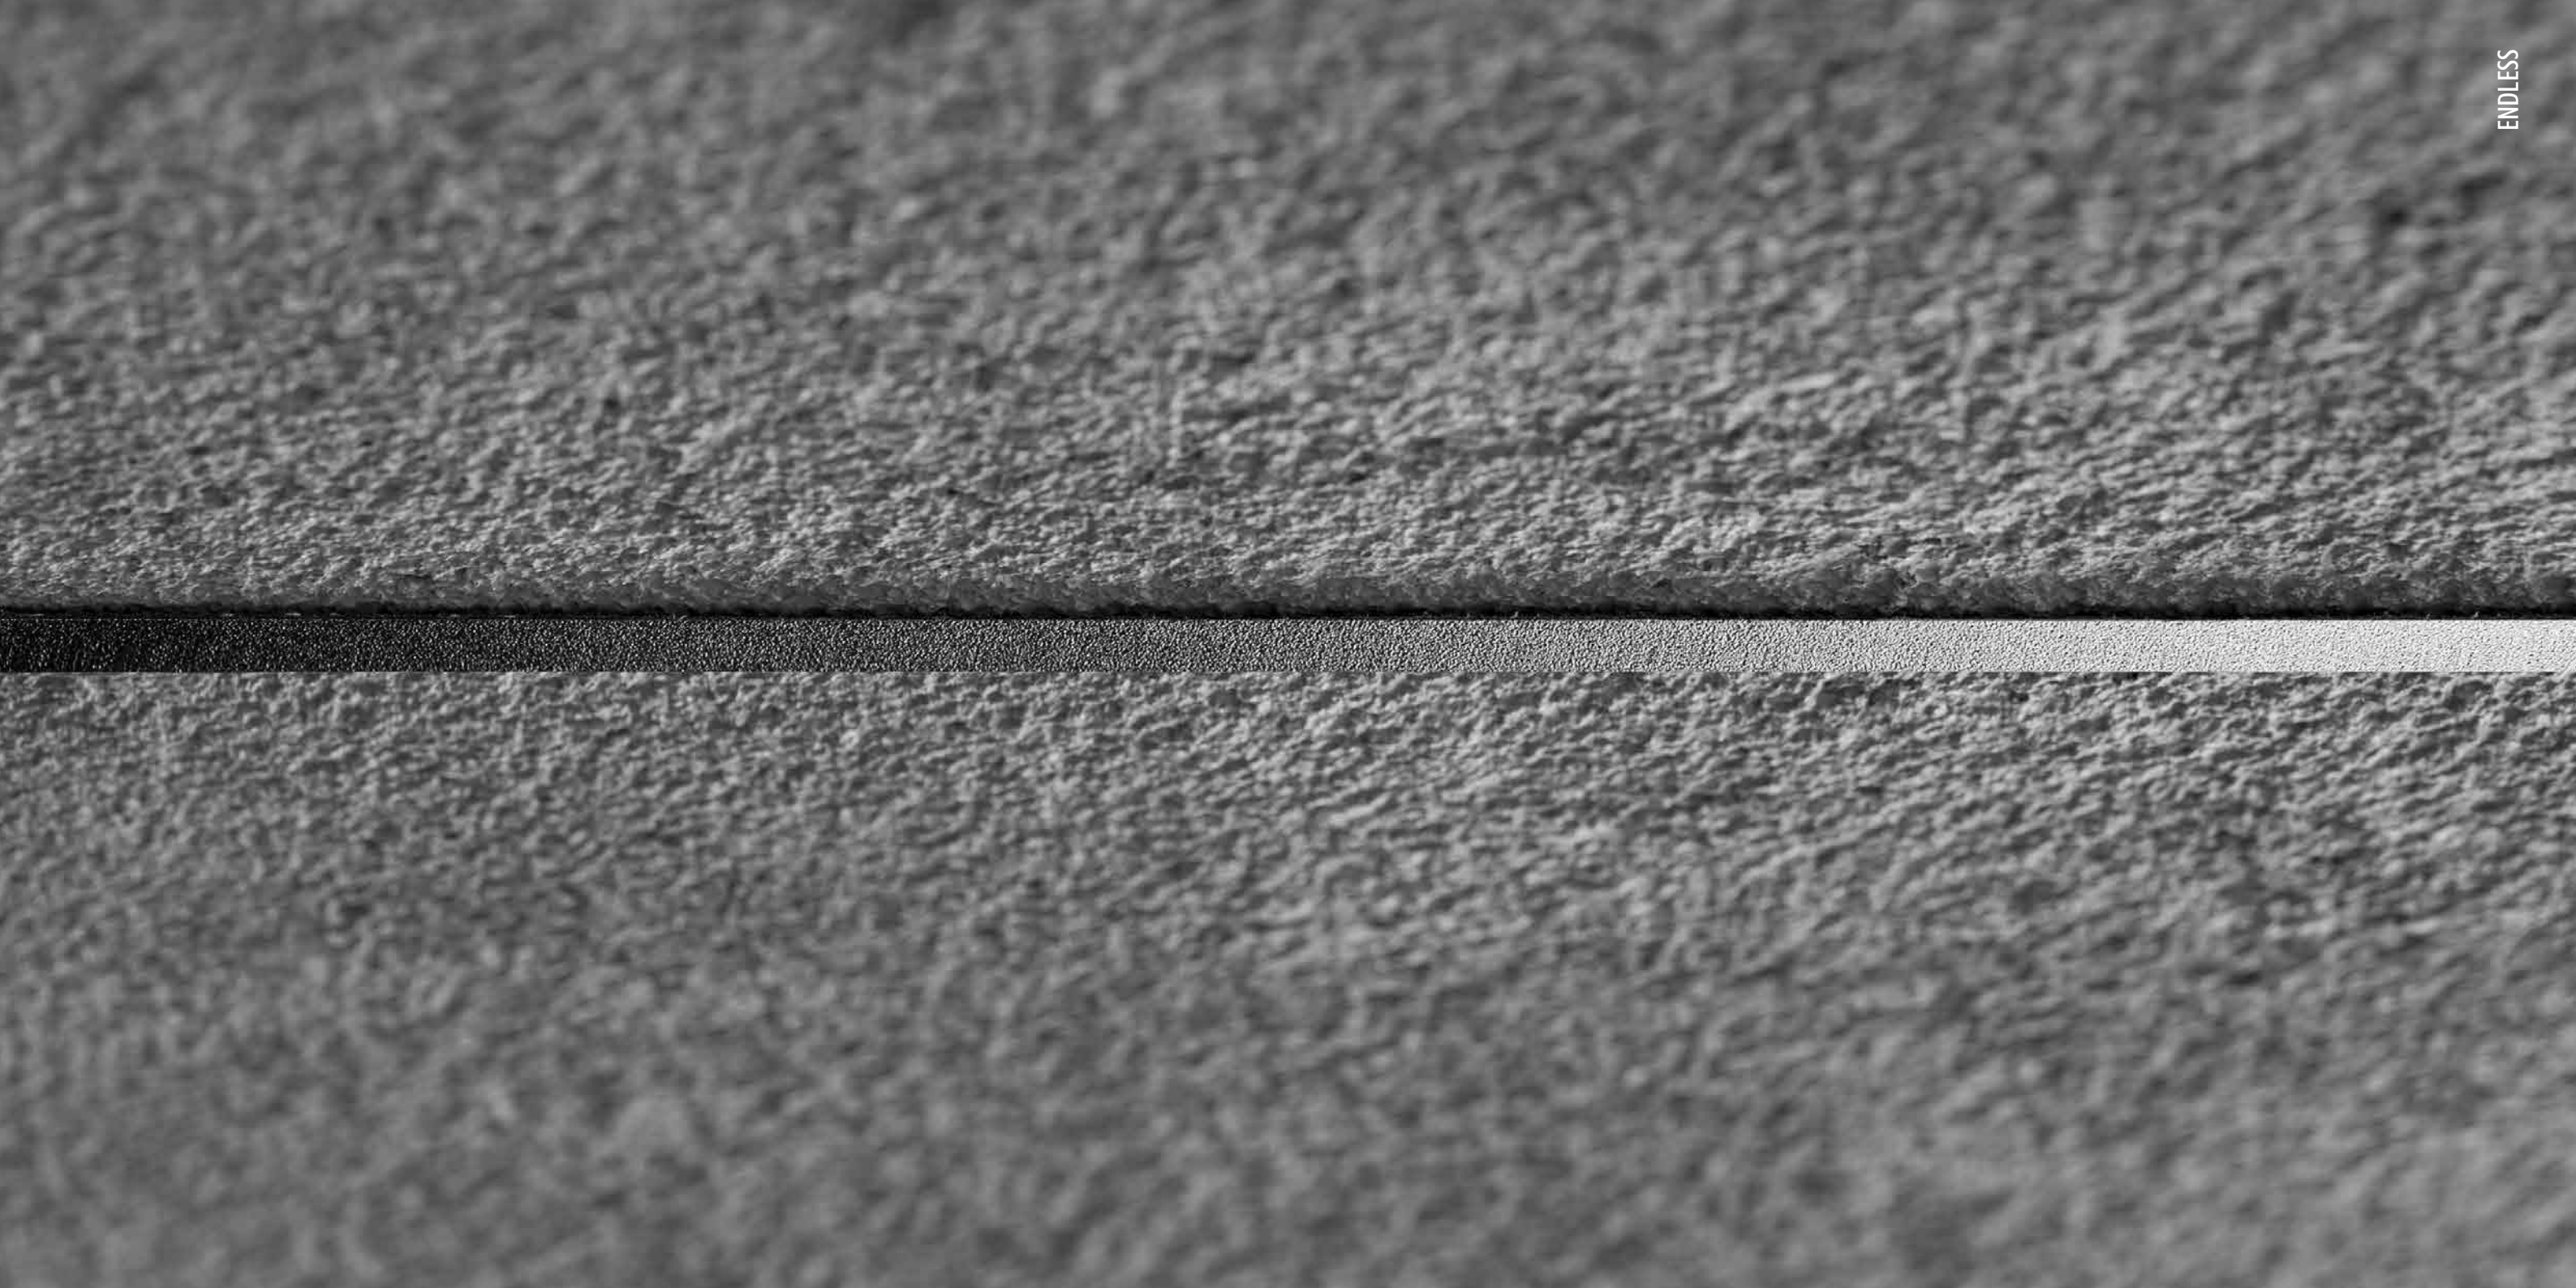

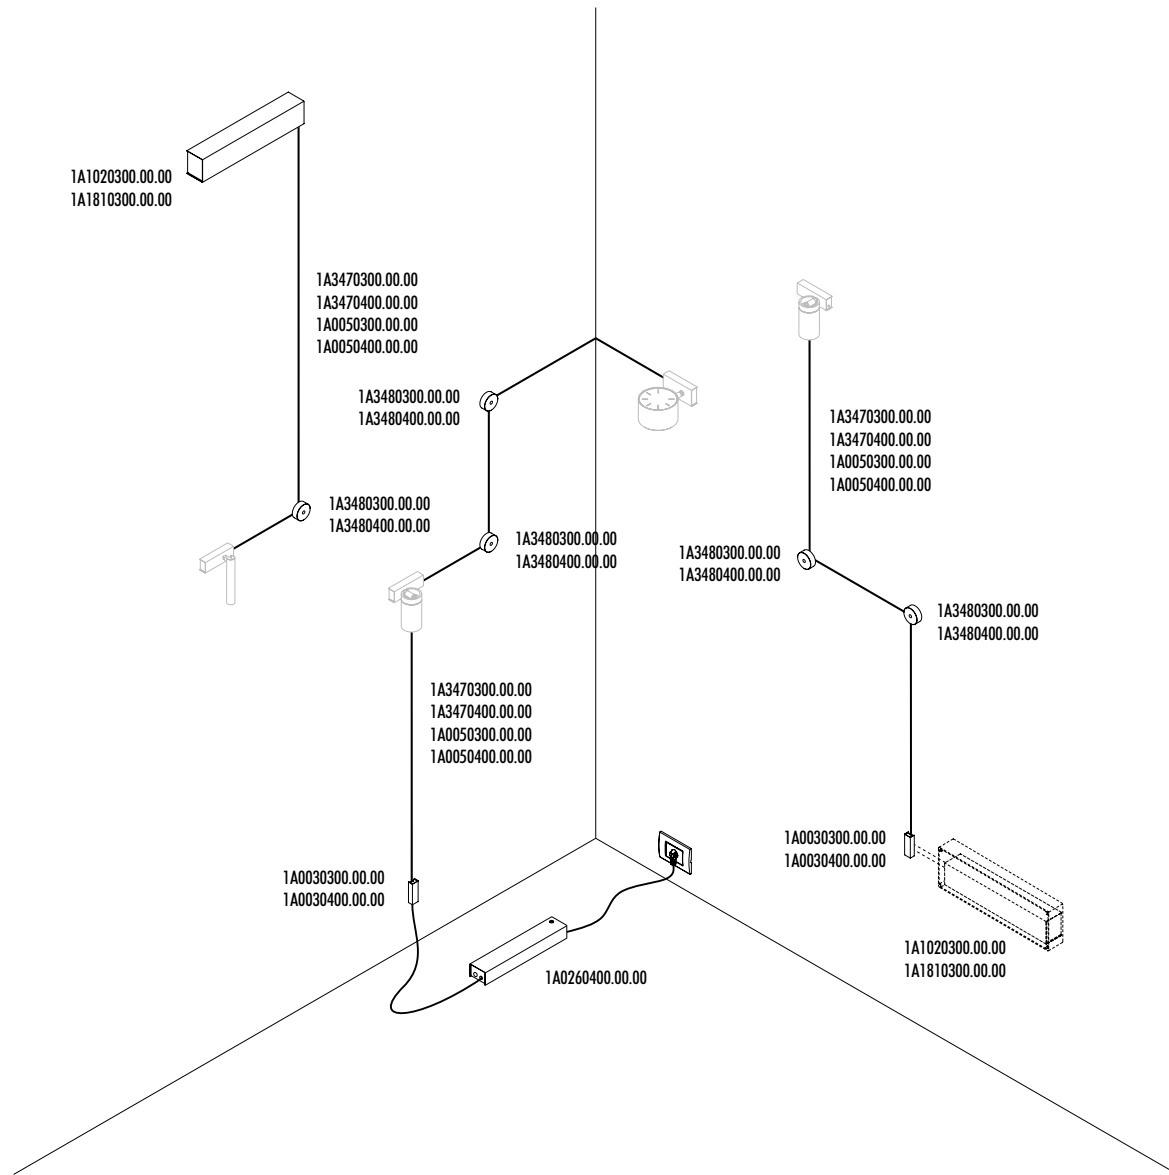

CE IP20


1A3470300.00.00	BIANCO OPACO / MATT WHITE - 5 m	ENDLESS - MAX 150 W - MAX 48 V DC - MAX 4 A	
1A3470400.00.00	NERO OPACO / MATT BLACK - 5 m		
1A0050300.00.00	BIANCO OPACO / MATT WHITE - 10 m		
1A0050400.00.00	NERO OPACO / MATT BLACK - 10 m		

1A0370000.00.00	STANDARD	KIT FISSAGGIO PARETI RUVIDE FIXING ROUGH WALLS KIT - 2,5 m	
-----------------	----------	---	--


1A3480300.00.00	BIANCO OPACO / MATT WHITE	BOX MORSETTI CON 2 MORSETTI INCLUSI TERMINAL BOX WITH 2 TERMINALS INCLUDED	
1A3480400.00.00	NERO OPACO / MATT BLACK		

1A0030300.00.00	BIANCO OPACO / MATT WHITE	BASE ALIMENTAZIONE / POWER BASE	
1A0030400.00.00	NERO OPACO / MATT BLACK		


1A3490000.00.00	STANDARD	MORSETTI - 2 PEZZI / TERMINALS - 2 PIECES	
-----------------	----------	---	--

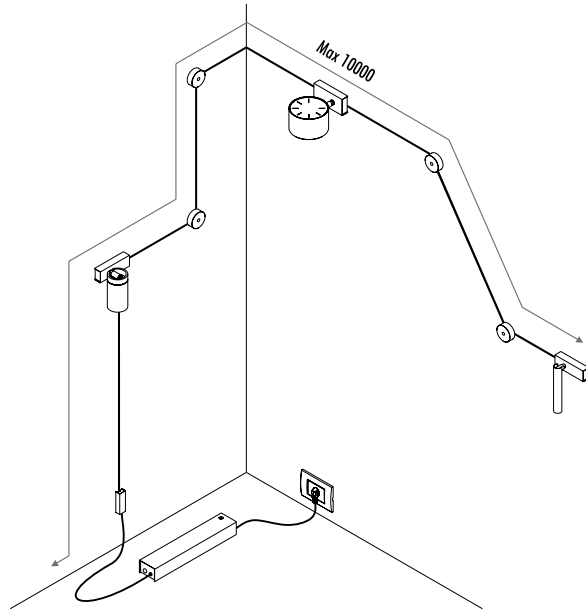

KIT ROSONE DA PARETE E SOFFITTO / WALL AND CEILING ROSE KIT

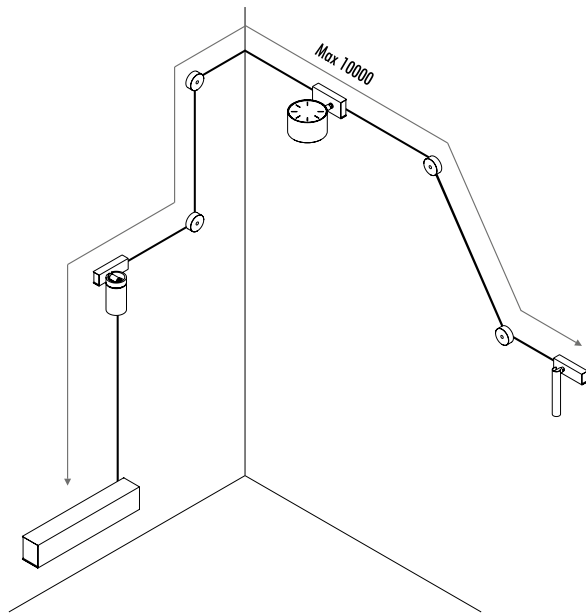

KIT DI ALIMENTAZIONE REMOTO / REMOTE POWER SUPPLY KIT

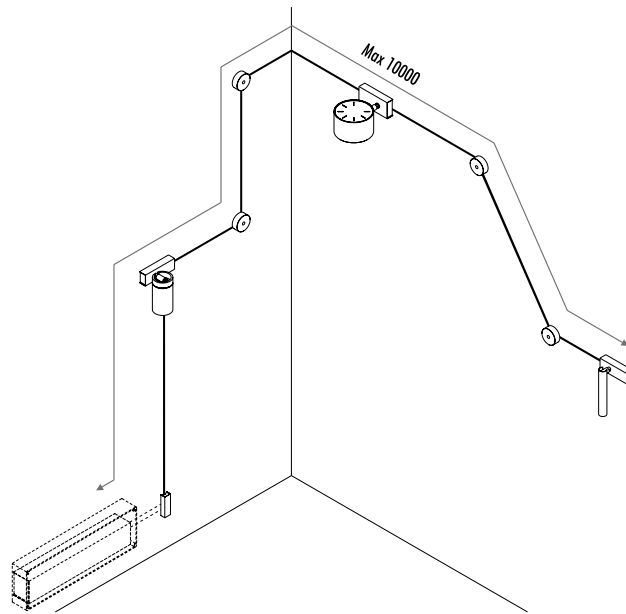

KIT ALIMENTAZIONE OBBLIGATORIO PER SISTEMA ENDLESS ON/OFF E CASAMBI
COMPULSORY POWER SUPPLY KIT FOR ENDLESS ON/OFF SYSTEM AND CASAMBI

CE IP20

1A0260300.00.00	BIANCO OPACO / MATT WHITE - ON/OFF	KIT DI ALIMENTAZIONE CON SPINA / POWER SUPPLY KIT WITH PLUG INPUT 100-240 V - 50/60 Hz - OUTPUT 48 V DC - 150 W	
1A0260400.00.00	NERO OPACO / MATT BLACK - ON/OFF		

1A1020300.00.00	BIANCO OPACO / MATT WHITE - ON/OFF	KIT ROSONE PARETE - SOFFITTO - REMOTO / WALL - CEILING ROSE - REMOTE KIT INPUT 100-240 V - 50/60 Hz - OUTPUT 48 V DC - 150 W - IP20	
1A1020400.00.00	NERO OPACO / MATT BLACK - ON/OFF		


KIT ALIMENTAZIONE OBBLIGATORIO PER SISTEMA ENDLESS DIMMERABILE
COMPULSORY POWER SUPPLY KIT FOR ENDLESS DIMMABLE SYSTEM

1A1800300.00.06	BIANCO OPACO / MATT WHITE	KIT DI ALIMENTAZIONE CON SPINA - DIMMER POWER SUPPLY KIT WITH PLUG - DIMMER INPUT 100-240 V - 50/60 Hz - OUTPUT 48 V DC - 150 W	
1A1800400.00.06	NERO OPACO / MATT BLACK		


1A1810300.00.07	BIANCO OPACO / MATT WHITE - DIM	KIT ROSONE PARETE - SOFFITTO - REMOTO / WALL - CEILING ROSE - REMOTE KIT INPUT 100-240 V - 50/60 Hz - OUTPUT 48 V DC - 150 W - IP20 DALI - PUSH - 0/1-10 V DIMMABLE	
1A1810400.00.07	NERO OPACO / MATT BLACK - DIM		

		WATTAGE	AMPERE (A)
POWER KIT:			
1A0260300.00.00	POWER SUPPLY KIT WITH PLUG - 48V - NOT DIMMABLE - MATT WHITE	150	MAX 3,125
1A0260400.00.00	POWER SUPPLY KIT WITH PLUG - 48V - NOT DIMMABLE - MATT BLACK	150	MAX 3,125
1A1020300.00.00	WALL CEILING ROSE - REMOTE KIT - 48V - NOT DIMMABLE - MATT WHITE	150	MAX 3,125
1A1020400.00.00	WALL CEILING ROSE - REMOTE KIT - 48V - NOT DIMMABLE - MATT BLACK	150	MAX 3,125
1A1800400.00.06	POWER SUPPLY KIT WITH PLUG - 48V - DIMMABLE	150	MAX 3,125
1A1810300.00.07	WALL CEILING ROSE - REMOTE KIT - 48V - DALI - PUSH - 0/1-10 V DIMMABLE	150	MAX 3,125
ELEMENTS:			
1A1080300.00.40	SPOT - MATT WHITE - ENDLESS	13	0,34
1A1080400.00.40	SPOT - MATT BLACK - ENDLESS	13	0,34
1A1080300.00.41	SPOT - MATT WHITE - ENDLESS - CASAMBI	15,5	0,4
1A1080400.00.41	SPOT - MATT BLACK - ENDLESS - CASAMBI	15,5	0,4
1A2340300.27.40	DOT P - MATT WHITE - 3000K - ENDLESS	13	0,34
1A2340300.30.40	DOT P - MATT WHITE - 2700K - ENDLESS	13	0,34
1A2340400.27.40	DOT P - MATT BLACK - 3000K - ENDLESS	13	0,34
1A2340400.30.40	DOT P - MATT BLACK - 2700K - ENDLESS	13	0,34
1A2340300.27.41	DOT P - MATT WHITE - 3000K - ENDLESS - CASAMBI	15,5	0,4
1A2340300.30.41	DOT P - MATT WHITE - 2700K - ENDLESS - CASAMBI	15,5	0,4
1A2340400.27.41	DOT P - MATT BLACK - 3000K - ENDLESS - CASAMBI	15,5	0,4
1A2340400.30.41	DOT P - MATT BLACK - 2700K - ENDLESS - CASAMBI	15,5	0,4
1A2280300.27.40	MIRA - MATT WHITE - 3000K - ENDLESS	6	0,16
1A2280300.30.40	MIRA - MATT WHITE - 2700K - ENDLESS	6	0,16
1A2280400.27.40	MIRA - MATT BLACK - 3000K - ENDLESS	6	0,16
1A2280400.30.40	MIRA - MATT BLACK - 2700K - ENDLESS	6	0,16
1A2280300.27.41	MIRA - MATT WHITE - 3000K - ENDLESS - CASAMBI	8,5	0,22
1A2280300.30.41	MIRA - MATT WHITE - 2700K - ENDLESS - CASAMBI	8,5	0,22
1A2280400.27.41	MIRA - MATT BLACK - 3000K - ENDLESS - CASAMBI	8,5	0,22
1A2280400.30.41	MIRA - MATT BLACK - 2700K - ENDLESS - CASAMBI	8,5	0,22
1A2960300.30.40	MISS - MATT WHITE - 3000K - ENDLESS	5,5	0,14
1A2960300.27.40	MISS - MATT WHITE - 2700K - ENDLESS	5,5	0,14
1A2960400.30.40	MISS - MATT BLACK - 3000K - ENDLESS	5,5	0,14
1A2960400.27.40	MISS - MATT BLACK - 2700K - ENDLESS	5,5	0,14
1A2960800.30.40	MISS - BRUSHED BRASS - 3000K - ENDLESS	5,5	0,14
1A2960800.27.40	MISS - BRUSHED BRASS - 2700K - ENDLESS	5,5	0,14
1A2962600.30.40	MISS - MATT TOTAL BLACK - 3000K - ENDLESS	5,5	0,14
1A2962600.27.40	MISS - MATT TOTAL BLACK - 2700K - ENDLESS	5,5	0,14
1A2980300.30.40	CATHODE - MATT WHITE - 2700K	5,5	0,14
1A2980300.27.40	CATHODE - MATT WHITE - 3000K	5,5	0,14
1A2980800.30.40	CATHODE - BRUSHED BRASS - 2700K	5,5	0,14
1A2980800.27.40	CATHODE - BRUSHED BRASS - 3000K	5,5	0,14
1A0850400.27.40	REFLEX - 2700K - ENDLESS	22	0,57
1A0850400.30.40	REFLEX - 3000K - ENDLESS	22	0,57
1A2250400.30.40	INFINITO 6 - MATT BLACK - 3000K - ENDLESS	52	1,35
1A2250400.27.40	INFINITO 6 - MATT BLACK - 2700K - ENDLESS	52	1,35
1A2260400.30.40	INFINITO 12 - MATT BLACK - 3000K - ENDLESS	103	2,68
1A2260400.27.40	INFINITO 12 - MATT BLACK - 2700K - ENDLESS	103	2,68
1A2130400.30.40	FLASH 6 - MATT BLACK - 3000K - ENDLESS	52	1,35
1A2130400.27.40	FLASH 6 - MATT BLACK - 2700K - ENDLESS	52	1,35
1A2150400.30.40	FLASH 12 - MATT BLACK - 3000K - ENDLESS	103	2,68
1A2150400.27.40	FLASH 12 - MATT BLACK - 2700K - ENDLESS	103	2,68


MIRA ENDLESS




DOT P ENDLESS



SPOT ENDLESS




REFLEX




MISS ENDLESS




CATHODE ENDLESS



INFINITO 6 - INFINITO 12 ENDLESS




FLASH 6 - FLASH 12 ENDLESS




ESEMPI DI INSTALLAZIONE / LAYOUT EXAMPLES

48 V KIT ALIMENTAZIONE: ASSORBIMENTO MAX 3,125 A / ENDLESS: LUNGHEZZA MAX 10 METRI DAL KIT ALIMENTAZIONE
48 V POWER SUPPLY KIT: ABSORPTION MAX 3,125 A / ENDLESS: MAX 10 METERS LENGHT FROM POWER SUPPLY KIT




2	MIRA	2 x 0,16 A
2	DOT P	2 x 0,34 A
3	SPOT	3 x 0,34 A
		<hr/>
TOT		2,02 A

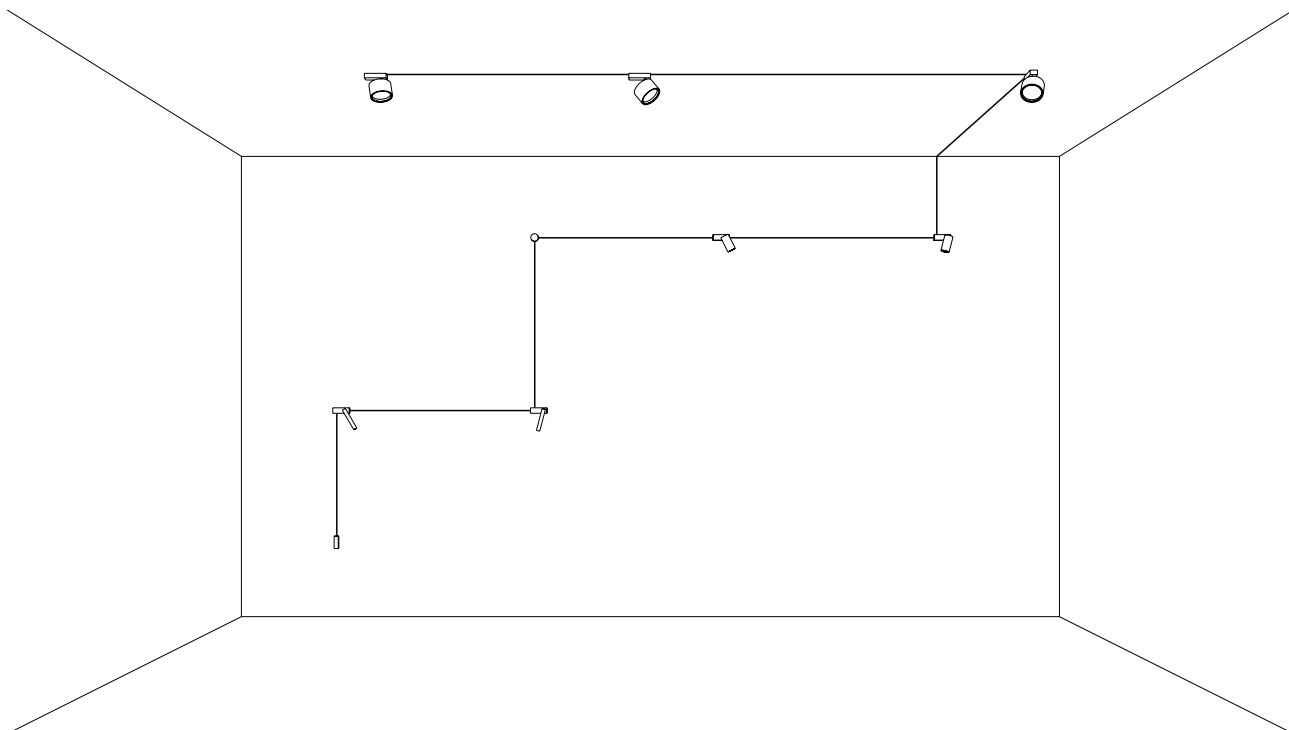


ESEMPI DI INSTALLAZIONE / LAYOUT EXAMPLES

48 V KIT ALIMENTAZIONE: ASSORBIMENTO MAX 3,125 A / ENDLESS: LUNGHEZZA MAX 10 METRI DAL KIT ALIMENTAZIONE
48 V POWER SUPPLY KIT: ABSORPTION MAX 3,125 A / ENDLESS: MAX 10 METERS LENGHT FROM POWER SUPPLY KIT




2	MIRA	2 x 0,16 A
3	MISS	3 x 0,14 A
1	REFLEX	0,57 A
		<hr/>
TOT		1,31 A

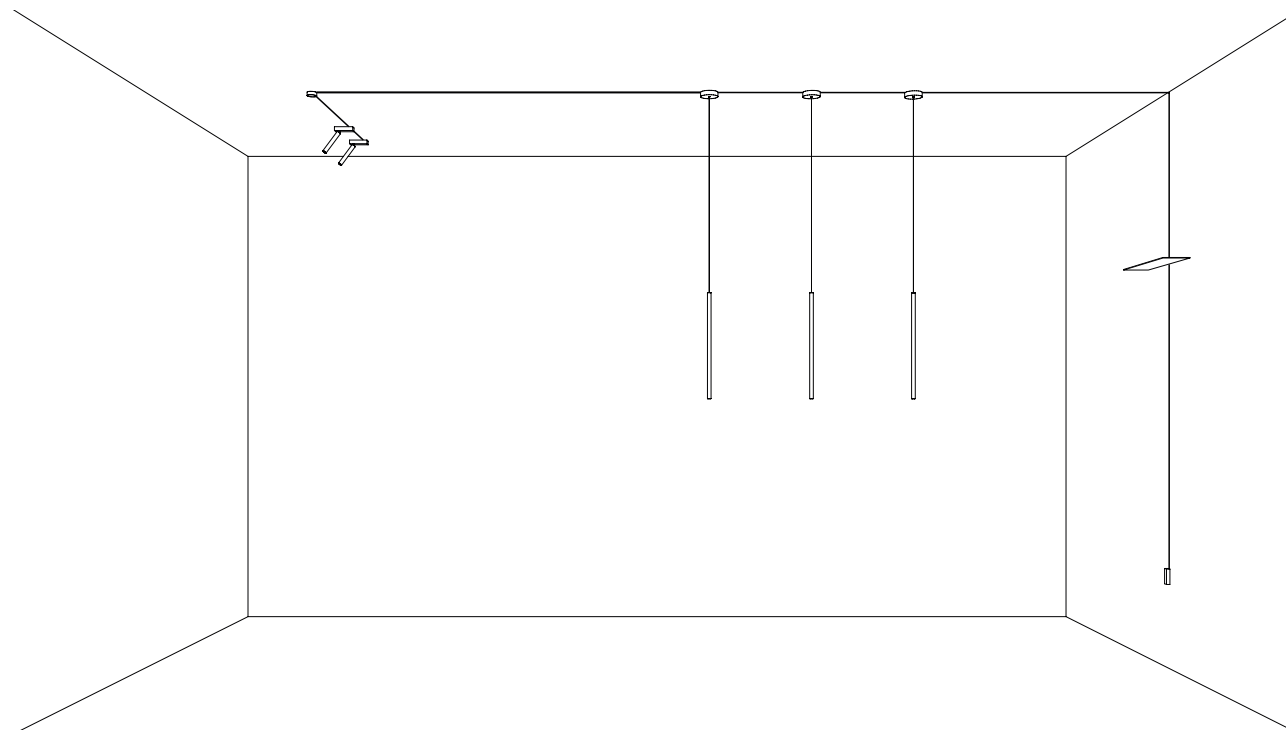


ESEMPI DI INSTALLAZIONE / LAYOUT EXAMPLES

48 V KIT ALIMENTAZIONE: ASSORBIMENTO MAX 3,125 A / ENDLESS: LUNGHEZZA MAX 10 METRI DAL KIT ALIMENTAZIONE
48 V POWER SUPPLY KIT: ABSORPTION MAX 3,125 A / ENDLESS: MAX 10 METERS LENGHT FROM POWER SUPPLY KIT




2	SPOT	2 x 0,34 A
1	INFINITO 6	1,35 A
		<hr/>
TOT		2,03 A

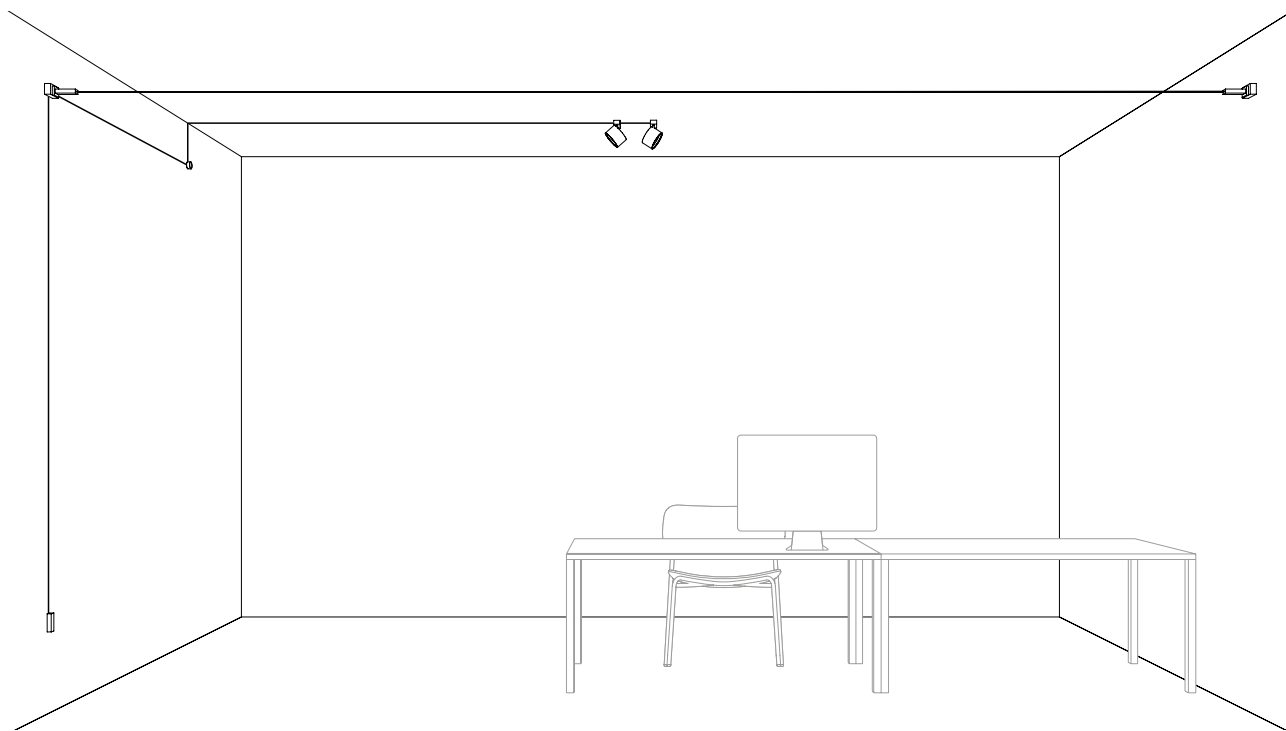

ESEMPI DI INSTALLAZIONE / LAYOUT EXAMPLES

48 V KIT ALIMENTAZIONE: ASSORBIMENTO MAX 3,125 A / ENDLESS: LUNGHEZZA MAX 10 METRI DAL KIT ALIMENTAZIONE
48 V POWER SUPPLY KIT: ABSORPTION MAX 3,125 A / ENDLESS: MAX 10 METERS LENGHT FROM POWER SUPPLY KIT



2	MISS	2 x 0,14 A
1	REFLEX	0,57 A
		<hr/>
TOT		0,85 A

