

## BILANCELLA

designed by Roberto Giacomucci

512.22 Sospensione - Pendant

### Collezione / Series

Bilancella

### Dimensioni / Dimensions

H. 3 x Ø. 50 / H. 1.2" x Ø. 19.7"

### Peso / Weight

6 kg / 13,2 lb

### Materiali / Materials

metal

CE  IP40

### Certificazioni / Certifications

CE (240V)

### Sorgente / Source

220/240 V

Integrated LED

Wattage: 38 Watts

Lumens: 3000 lm

Color Temperature: 2700K

Cable: 800 cm

### Note / Notes

Custom ceiling plate on request

Only in 220/240V

### Finiture / Finishes

C74 Sand black

Struttura a sospensione realizzata in metallo da una piatto diffusore circolare e da decentratori per l'ancoraggio a muro, che le permettono di adattarsi ad ogni spazio. Fornita con cavo in tessuto lungo 8 mt e tre decentratori.

Pendant lamp with structure made of metal by a circular diffuser plate and cable holders for wall anchoring, which allow to adapt to any space. Supplied with 8 meters fabric cable and three ceiling attachments.

## ABOUT

Lampada a sospensione, soffitto e parete con diffusore in metallo verniciato a polveri epossidiche di spessore molto sottile.

La versione decentrata, presenta un sistema di fissaggio a soffitto versatile che permette di illuminare anche in assenza di punti luce predisposti a soffitto. I decentratori in metallo infatti, permettono al filo elettrico di scorrere per portare la luce dove occorre. Grazie alla sua essenziale forma, la luce si diffonde uniformemente in tutto l'ambiente.

Suspension, ceiling and wall lamp with a thin metal powder coated diffuser. The decentrate version has a versatile ceiling mounting system allowing to illuminate even in absence of electrical connection on the ceiling. In addition, the metal decentralizers allow the wire to slide to bring the light where it is needed. Thanks to its essential form, the light spreads evenly throughout the environment.



# BILANCELLA

512.22 Pendant

**Design:** Roberto Giacomucci

**Description:** Pendant with a thin metal powder coated diffuser. The decenterate version has a versatile ceiling mounting system allowing to illuminate even in absence of electrical connection on the ceiling. In addition, the metal ceiling attachment allow the wire to slide to bring the light where it is needed. Thanks to its essential form, the light spreads evenly throughout the environment.

**Materials:** metal


**Mounting:** Pendant: cable length 800 cm. Cable: 3 x 0,75 mm<sup>2</sup>. Plug: type F (Schuko). Ceiling attachment: 3 included.

**Nt. Wt.:** 6 kg

**Class:** Degree of protection IP40, insulation class 1.

**Note:** Custom canopy on request  
Additional ceiling attachment available

CE  $\oplus$  IP40

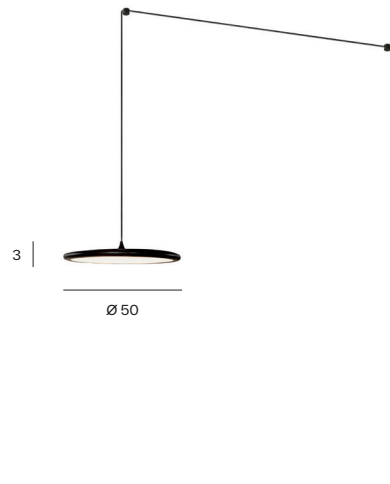


code	source	lumens	dimmability	finishes	cable (cm)	dimensions (cm)	LED
512.22	LED 220/240V	3000 Lm	/	C74	800	H 3 x Ø 50	38W 2700K

Hardware



C74 Sand black

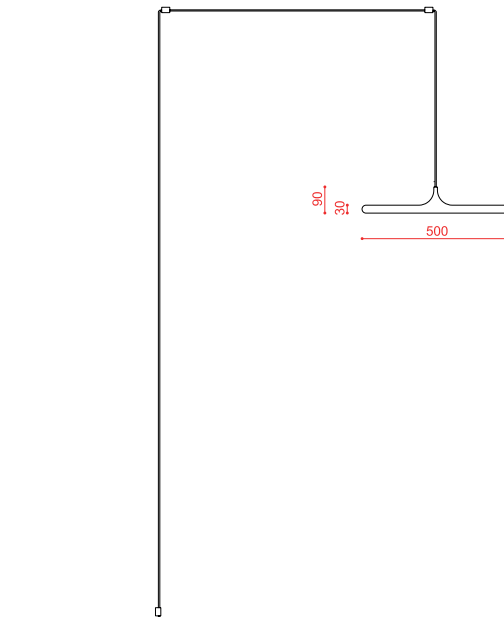

measurements in mm